

(19) World Intellectual Property  
Organization  
International Bureau



10/538303



(43) International Publication Date  
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number  
WO 2004/052250 A1

(51) International Patent Classification<sup>7</sup>: A61F 7/00, 7/02, 7/03, 7/08

(21) International Application Number:  
PCT/AU2003/001626

(22) International Filing Date: 9 December 2003 (09.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2002953185 9 December 2002 (09.12.2002) AU

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant and  
(72) Inventor: DUNLOP, Colin [AU/AU]; Unit 13, 46-48 Buffalo Road, Gladesville, New South Wales 1670 (AU).

Published:  
— with international search report

(74) Agent: GRIFFITH HACK; GPO Box 4164, SYDNEY, New South Wales 2001 (AU).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PATIENT WARMING SYSTEM

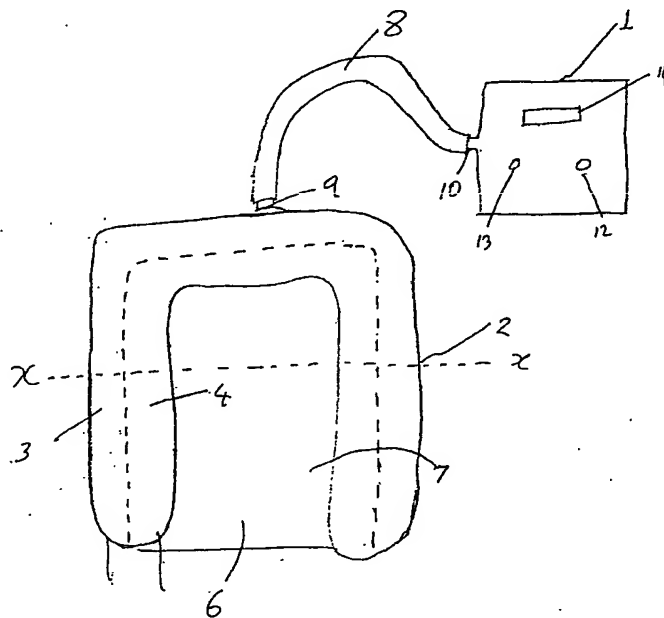

(57) Abstract: The present invention relates to a patient warming system and in particular a patient warming blanket (2) for warming patients undergoing medical care. The patient warming blanket is particularly for use in veterinary medicine. The warming blanket includes a porous surface (4) from which warmed air can escape over the entire porous surface, evenly warming the patient.

JC20<sup>1</sup> Rec'd PCT/PTO 09 JUN 2005

## PATIENT WARMING SYSTEM

REPLACED BY  
ART 34 AMDTField of the Invention

5

The present invention relates to a warming system for patient care and, particularly, but not exclusively, to a warming system for use in veterinary care.

10 Background of the Invention

There are many circumstances in human and animal medicine where it is necessary to keep a patient warm to, for example, prevent or treat hypothermia.

15 In human medicine, it is known to provide patient warming systems which include a patient warming blanket and a heating unit. The patient warming blanket includes two layers which are bonded or stitched together at a seam and are otherwise separable from each other to form a  
20 hollow space within the blanket when warm air is pumped from the heating unit via a delivery tube in between the two layers. One of the layers contains a plurality of air holes which allow the pumped warm air to escape from the blanket. In operation, the patient is wrapped or covered  
25 in the warming blanket with the layer with the holes next to the patient. Warm air is pumped in from the heating unit and escapes from the air holes on the inside layer of the blanket and keeps the patient warm.

These patient warming systems are designed for use in  
30 human medicine only, for the prevention and treatment of hypothermia during anaesthesia and critical care.

There is, however, a similar need for a patient warming system in veterinary care. Presently, similar warming systems are used as those designed for human  
35 patients. There are a number of problems associated with the use of the human patient warming system in veterinary care, however.

Small animals have a relatively large surface area to volume ratio, which makes them particularly susceptible to hypothermia. The applicants have found that using a conventional human warming system to maintain the body temperature of a relatively small animal can actually result in cooling of the animal (which can lead to death). This occurs, we believe, because the air flow is delivered to the patient by individual, discreet holes in the inner layer of the warming blanket. In a patient with relatively large surface area to volume, delivery of air from an air hole, so that the air is moving relatively rapidly, can cause the patient to chill, as the air takes away more heat from the surface of the patient than it delivers. Obviously, this is very dangerous in a critical care situation.

Another problem is that the heating unit used in the human systems typically only heats to a temperature of 43°C. Animals have a range of body temperatures and in many circumstances a system which provides heated air at a maximum of 43°C is not sufficient.

Another problem which relates to animals, which in veterinary situations are often smaller and sometimes much smaller than human beings, is that the human patient warming blankets are relatively large, and a small animal placed under one of these will not be adjacent sufficient air holes to provide sufficient warm air to maintain the animal's temperature.

Further, in surgery and other circumstances where sterile conditions are required, having air blown at relatively high velocity through a small hole can result in contamination of the site eg. the surgical site, via substances blown onto the surgical site by air from the air holes.

### Summary of the Invention

In accordance with a first aspect, the present

REPLACED BY  
ART 34 AMDT

invention provides a patient warming blanket comprising at least two layers capable of forming an air space between them for receiving warmed air from a heating unit, one of the two layers having a proportion of its surface formed  
5 of porous material so that warmed air delivered to the air space may escape via the porous material over the proportion of the surface of the one layer.

In one embodiment, in operation the porous material is arranged to be adjacent to a patient receiving  
10 treatment. Delivering heat spread over the surface of the porous material advantageously has the effect of evenly warming the patient without forming relatively high velocity streams of air (as in the prior art blanket where the air is delivered via discreet holes). Animals,  
15 therefore, and in particular small animals, are not at risk of being cooled by relatively high velocity air streams. In one embodiment, a substantial proportion of the surface of the one layer is of porous material. Preferably, a majority of the surface of the one layer is  
20 of porous material. In operation, warm area is advantageously delivered at relatively low velocity over the proportion of the surface of the one layer.

Preferably, the blanket is designed not to cover the animal patient, but instead to provide a patient receiving  
25 area in which the patient lies surrounded at least on three sides by a tube formed by the blanket when air is pumped into the air space. In this embodiment, at least the sides of the tube facing inwards towards the patient are of the porous material. This has the effect of  
30 passing warm air over the patient within the space, so no matter how large the patient, the air in the space will be kept at substantially the same temperature.

Preferably, the surface of the blanket is fluid repellent, so that any liquid contamination rolls off the  
35 blanket.

In an alternative embodiment, the entire blanket may be made of porous material so that warmed air is delivered

REPLACED BY  
ART 34 AMDT

over the entire surface of the blanket that is exposed. The unexposed surface of the blanket e.g. facing down on a bench, may not deliver air. The exposed surface, however, including the surface which may be adjacent to patient in operation, will deliver air. This saves cost in manufacture of the blanket as it is only necessary to manufacture the blanket from one type of material. This can be significant, as in the majority of cases these blankets are intended to be disposable after one use.

10 In accordance with a second aspect, the present invention provides a patient warming blanket comprising at least two layers capable of forming a hollow air space between them for receiving warmed air from a heating unit, the two layers and air space being arranged in operation  
15 to form a substantially tubular arrangement at least partially surrounding a patient receiving space, whereby when warm air is passed into the air space it is delivered to the patient receiving space via the blanket, to maintain warm air within the patient receiving space.

20 Preferably, the tubular arrangement surrounds the patient receiving space on three sides.

One other problem with the conventional human patient warming systems is that it has been known for carers to direct heat directly from the heating unit via a delivery  
25 tube directly onto the patient. This can cause burning, particularly in small animals, and is not something that should occur.

In accordance with a third aspect, the present invention provides a heating unit for a patient warming  
30 system, the heating unit including a delivery port for delivering warmed air to a patient warming blanket, and a feedback means for determining whether a patient warming blanket is attached and being responsive to a determination that the patient warming blanket is not  
35 attached, to disable delivery of warmed air via the port.

Preferably, the feedback means comprises a pressure sensor, for sensing back pressure on the air delivery

REPLACED BY  
ART 34 AMDT

port. When a blanket is attached, there will be a certain amount of back pressure on the delivery port, so that when this back pressure is detected, air may delivered.

Preferably, the heating unit is arranged to heat air  
5 to a range of temperatures, preferably up to 46°C.

In accordance with a fourth aspect, there is provided a heating system comprising a patient warming blanket in accordance with the first aspect of the present invention and a heating unit in accordance with the third aspect of  
10 the present invention.

#### Brief Description of the Drawings

Figure 1 is a plan view of a patient warming blanket  
15 in accordance with one embodiment of the present invention, shown connected to a heating unit in accordance with one embodiment of the present invention;

Figure 2 is a cross sectional view on line XX of  
figure 1;

20 Figure 3 is a plan view of a patient warming blanket in accordance with a further embodiment of the present invention; and

Figure 4 is a view from the front of the embodiment  
of Figure 3.

25

#### Description of Preferred Embodiment

With reference to the figures, a patient warming system in accordance with an embodiment of the present  
30 invention is illustrated, particularly being designed for use in veterinary medicine. The patient warming system comprises a heating unit 1 (to be described in more detail later) and a patient warming blanket 2.

The patient warming blanket 2 includes first 3 and  
35 second 4 layers of material which form a hollow air space 5 between them. In this embodiment, when the warming blanket 2 is not being used, it will lie substantially

REPLACED BY  
ART 34 AMDT

flat as no air is being pumped into the air space 5. In use, however, when air is being pumped into the air space 5, the blanket "inflates" to give the profile shown in the cross-section of figure 2.

5           The first layer 3 is substantially non porous to air. The second layer 4, however, is made of porous material and is substantially porous over its entire surface area. Warm air pumped into the hollow air space 5, therefore, escapes via the entire surface of the second layer 4.

10           The warming blanket 2 may be made of any appropriate material and in this embodiment is made from polyester. The second surface 4 being of porous polyester.

          The arrangement of the first 3 and second layers 4 in operation in this embodiment forms a tubular  
15 arrangement which extends about three sides of a patient receiving space 6. In this embodiment, a continuation 7 of the first layer 3 provides a blanket base on which the patient may lie.

          In operation, warmed air is provided from the heating  
20 unit 1 via a flexible heat delivery tube 8 into a port 9 to the interior space 5 of the blanket. The warmed air inflates the blanket to give the profile illustrated in figure 2. The patient is positioned within the patient receiving space 6. Warm air escapes via the porous second  
25 layer 4 into the patient receiving space maintaining the patient receiving space 6 at a substantially even temperature. The shape of the blanket maximises the convective surface area for heating.

          The material of the warming blanket 2 is treated to  
30 be fluid repellent, so that any liquid contamination rolls off the blanket.

          In an alternative embodiment, the blanket may consist of the same main material over all of its surface. Warmed air is therefore delivered over all of the exposed surface  
35 of the blanket. This blanket may be cheaper to make.

          The heating unit 1 includes a feedback means which in this embodiment is a pressure sensor. The pressure sensor

REPLACED BY  
ART 34 AMDT

is arranged to sense a certain amount of back pressure on a delivery port 10 of the heating unit which delivers warmed air to the delivery tube 8. The existence of this back pressure implies that a warming blanket 2 is attached  
5 to the delivery tube 8. If the back pressure signal is not received by the pressure sensor, then delivery of warmed air 10 via the port is disabled. This prevents any operative attempting to provide warmed air directly to a patient via the delivery tube 8, without using a warming  
10 blanket.

The heating unit 1 includes control and selection means 12, 13, 14 that enables a selection of plurality of temperatures for the warmed air, and in this embodiment warmed air can be delivered at temperatures of 34, 37, 40,  
15 43 or 46 degrees Centigrade.

The heating unit 1 is based on a conventional heating unit, but adapted to deliver the above temperatures. A further adaptation is the addition of the pressure sensor and feedback to temperature control circuitry (not shown)  
20 to switch off the delivery of warmed air if a back pressure is not sensed (implying that the warming blanket 2 is not attached to the delivery tube 8).

Figure 3 and Figure 4 show an alternative embodiment of the patient warming blanket. The alternative patient  
25 warming blanket 20 comprises an air inlet 21 which is on one "leg" 22 of the blanket. Otherwise, the blanket is of similar construction to the patient warming blanket of Figures 1 and 2. Similar reference numerals have been used for similar components as the embodiment of Figures 1  
30 and 2.

In the above-described embodiment the patient warming blanket will be appropriately dimensioned for veterinary care. Example dimensions include 560mm width, 1110mm length, with width of each of the arms when inflated being  
35 110mm. Note that these dimensions are examples only and, the present invention is not limited to these dimensions.

While the above description refers to application of

REPLACED BY  
ART 34 AMDT



the warming system with animal patients, the system of the present invention is not limited to use with animal patients and can be used with human patients eg. small human patients.

- 5            Modifications and variations as would be apparent to a skilled addressee are deemed to be within the scope of the present invention.

REPLACED BY  
ART 34 AMDT

## CLAIMS

1. A patient warming blanket comprising at least two layers capable of forming an air space between them for  
5 receiving warmed air from a heating unit, one of the two layers having a proportion of its surface formed of porous material so that warmed air delivered to the air space may escape via the porous material over the proportion of the surface of the one layer.
- 10 2. A patient warming blanket in accordance with claim 1, wherein the two layers and air space are arranged in operation to form a substantially tubular arrangement at least partially surrounding a patient receiving space, whereby when warmed air is passed into the air space it is  
15 delivered to the patient receiving space.
3. A patient warming blanket in accordance with claim 2, wherein the tubular arrangement surrounds the patient receiving space on three sides.
4. A patient warming blanket in accordance with claim 1,  
20 2 or 3, wherein the surface of the blanket is fluid repellent, so that liquid contamination rolls off the surface.
5. A patient warming blanket comprising at least two layers capable of forming a hollow air space between them  
25 for receiving warmed air from a heating unit, the two layers and air space being arranged in operation to form a substantially tubular arrangement at least partially surrounding a patient receiving space, whereby when warm air is passed into the air space it is delivered to the  
30 patient receiving space via the blanket, to maintain warm air within the patient receiving space.
6. A heating unit for a patient warming system, the heating unit including a delivery port for delivering warmed air to a patient warming blanket, and a feedback  
35 means for determining whether a patient warming blanket is attached and responsive to a determination that the patient warming blanket is not attached, to disable

REPLACED BY  
ART 34 AMDT

delivery of warmed air via the port.

7. A heating unit in accordance with claim 6, wherein the feedback means includes a pressure sensor for sensing back pressure on the air delivery port.

5 8. A heating unit in accordance with claim 6 or 7, the heating unit being arranged to heat the air to a range of temperatures.

9. A heating unit in accordance with claim 8, being arranged to heat air up to 46°C.

10 10. A heating system comprising a patient warming blanket in accordance with any one of the claims 1 to 5 and a heating unit in accordance with any one of claims 6 to 9.

**REPLACED BY  
ART 34 AMDT**